

# J&J Service Instructions

January 5, 2005

## SB-120 Terminal Replacement




- Remove brush covers, one on each side of the motor



- Loosen screw next to the brush Assembly.

**▲ TECH TIP** Do not remove the screw just loosen it enough to remove the fork terminal

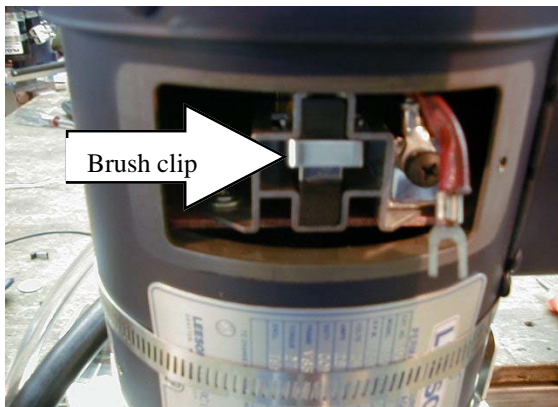

- Carefully remove wire from motor Case



- Push inward and down to release the brush clip then slowly allow clip to slide outward and set it aside

# J&J Service Instructions

January 5, 2005

## SB-120 Terminal Replacement




- Slide brush assembly out of housing



- Corrosion block will help lubricate and seal out water



- Clean or replace brushes as needed use corrosion block on all motor parts to seal from corrosion and keep brushes from sticking

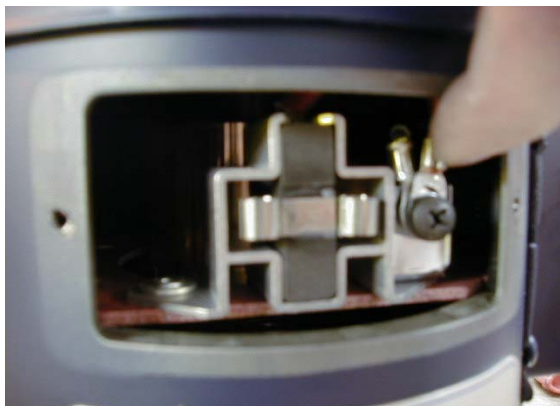

- Re-install brush assembly and install fork terminal on screw

# J&J Service Instructions

January 5, 2005

## SB-120 Terminal Replacement



- Re-install brush clip by pushing in then up and slowly releasing and it will clip into place



- Re-install brush cover and spray it with corrosion block to keep moisture out

### Parts

- 900015.08 Brush, Leeson 3/4 hp #108052
- 99101 Corrosion Block, Aerosol 12 oz.  
Protector/Penetran