


J&J STANDARDS & GUIDELINES FOR BUMPER BOATS

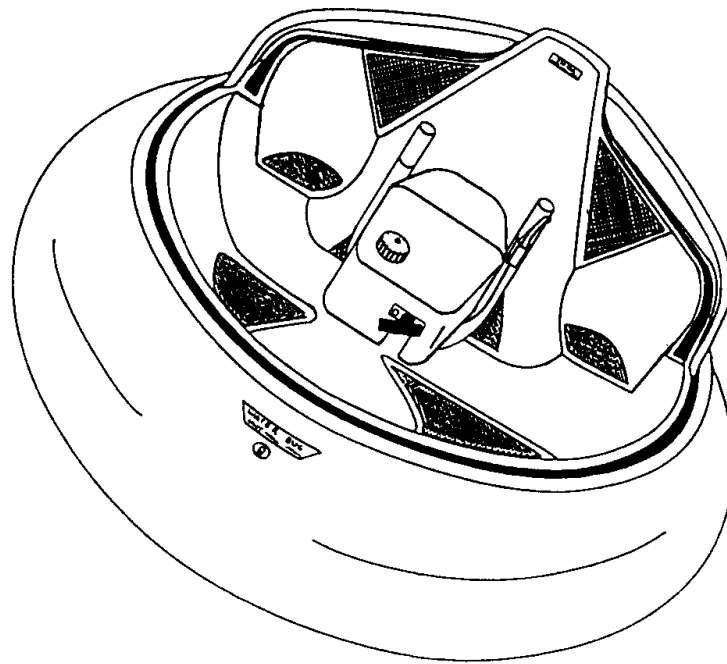

	<h2>Amusements, Inc.</h2> <p>A Corporation of Oregon</p>	<p>503-304-8899. 1-800-854-3140 FAX: 503-304-1899</p>
<p>4897 Indian School Rd NE. Salem, OR. 97305 USA E-mail: info@jjamusements.com www.jjamusements.com</p>		

J&J Amusements, Inc.

Bumper Boat

Standards

(revised 06/09/2003)

J&J Bumper Boat Design & Manufacturing

- 1.0 J&J will provide maintenance and repair manual for bumper boats.
 - 1.2 All bumper boats will have a manufacturer's plate attached. The plate should include model, date and place of manufacturing origin.
 - 1.3 All bumper boats will have safety and warning decals posted
The decals are:
WARNING-KEEP HANDS AND FEET IN BOAT AT ALL TIMES.
WARNING-NEVER STAND UP WHILE BOAT IS OPERATING.
WEIGHT LIMIT 450 lb.
- Note: All warning decals must be legible at all times. Any warning, caution, or other manufacturer decals should never be removed.***
- 1.4 Throttle returns automatically to a slow operational position when released.
 - 1.5 All bumper boats meet Coast Guard and Federal standards for recreational boat construction.
 - 1.6 For man made ponds the recommended maximum water depth should be 36 inches (914.4mm). Water minimum depth should be maintained as to not allow motor to hit or drag bottom.
 - 1.7 For natural ponds water minimum depth should be maintained as to not allow motor to hit or drag bottom. Refer to local, state and federal regulations that may apply.

1.8 All Bumper Boat motors are equipped with propeller guards which must be in place and in proper working condition whenever ride is in operation.

1.9 Bumper Boat motors may be equipped with heat shields and guards which must be in place and in proper working condition whenever ride is in operation.

1.10 Hand rails to assist riders in entry and exit should be provided.

1.11 At least one trained attendant must be present at all times during ride operation to supervise the safe operation of the Bumper Boats.

1.12 Pre-Opening check list for bumper boats must be completed prior to opening the ride for daily operation.

1.13 Attraction operators should verify the drivers are minimum 44in (111.76cm)

1.14 To carry a passenger the driver must be minimum of 18 years of age or the parent or legal guardian of the passenger. Attraction operators should also verify the passengers are minimum 40in (101.6cm) tall and possess upper body control.

Created on 9/16/04

T:\Customer info request\Bulletin & Guidelines\Standards & Guidelines\Current Standards for manuals\Standards & Guidelines for Bumper Boats 9-16-04.doc